


# DIN913

Stelschroef met binnenzeskant en afschuiving  
 Gewindestifte mit Kegelkuppe mit Innensechskant  
 Hexagon socket set screw with flat point

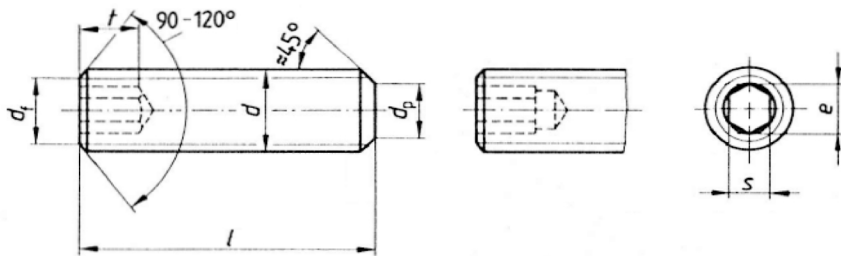

	d	M1,4	M1,6	(M 1,8)	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24		
		dp	max.	0,7	0,8	0,9	1	1,5	2	2,5	3,5	4	5,5	7	8,5	10	12	13	15	17	18
		min.	0,45	0,55	0,65	0,75	1,25	1,75	2,25	3,2	3,7	5,2	6,64	8,14	9,64	11,57	12,57	14,57	16,57	17,57	
e	min.	0,803	0,803	0,803	1,003	1,427	1,73	2,30	2,87	3,44	4,58	5,72	6,86	6,86	9,15	11,43	11,43	13,72	13,72		
maat		0,7	0,7	0,7	0,9	1,3	1,5	2	2,5	3	4	5	6	6	8	10	10	12	12		
s	min.	0,711	0,711	0,711	0,889	1,27	1,52	2,02	2,52	3,02	4,02	5,02	6,02	6,02	8,025	10,025	10,025	12,032	12,032		
	max.	0,724	0,724	0,724	0,902	1,295	1,545	2,045	2,56	3,08	4,095	5,095	6,095	6,095	8,115	10,115	10,115	12,142	12,142		
t		0,6	0,7	0,8	0,8	1,2	1,2	1,5	2	2	3	4	4,8	5,6	6,4	7,2	8	9	10		
		1,4	1,5	1,6	1,7	2	2	2,5	3	3,5	5	6	8	9	10	11	12	13,5	15		
l	maat	min.	max.																		
		2	1,80	2,20																	
		2,5	2,30	2,70																	
		3	2,80	3,20																	
		(3,5)	3,26	3,74																	
		4	3,76	4,24																	
		5	4,76	5,24																	
		6	5,76	6,24																	
		8	7,71	8,29																	
		10	9,71	10,29																	
		12	11,65	12,35																	
		(14)	13,65	14,35																	
		16	15,65	16,35																	
		(18)	17,65	18,35																	
		20	19,58	20,42																	
		(22)	21,58	22,42																	
		25	24,58	25,42																	
		(28)	27,58	28,42																	
		30	29,58	30,42																	
		35	34,5	35,5																	
		40	39,5	40,5																	
		45	44,5	45,5																	
		50	49,5	50,5																	
		55	54,4	55,6																	
		60	59,4	60,6																	