


DIN914



het

Stelschroef met binnenzeskant en kegelpunt
 Gewindestifte mit Spitze mit Innensechskant
 Hexagon socket set screw with cone point

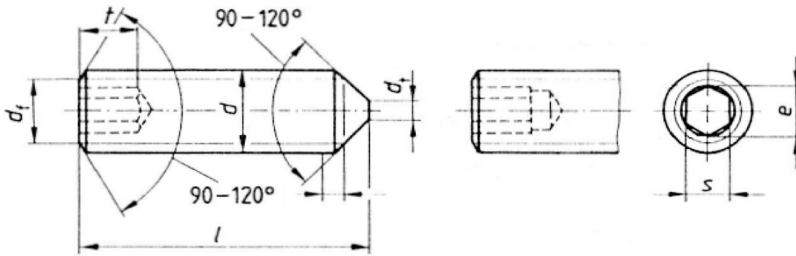

d	M1,4	M1,6	(M 1,8)	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24	
dt	max.	-	-	-	-	-	-	-	1,5	2	2,5	3	4	4	5	5	6	6	
	min.	-	-	-	-	-	-	-	0,9	1,4	1,9	2,4	3,25	3,25	4,25	4,25	5,25	5,25	
e	min.	803	803	803	1,003	1,427	1,73	2,30	2,87	3,44	4,58	5,72	6,86	6,86	9,15	11,43	11,43	13,72	13,72
s	maat	0,7	0,7	0,7	0,9	1,3	1,5	2	2,5	3	4	5	6	6	8	10	10	12	12
	min.	0,711	0,711	0,711	0,889	1,27	1,52	2,02	2,52	3,02	4,02	5,02	6,02	6,02	8,025	10,03	10,03	12,03	12,03
t	max.	0,724	0,724	0,724	0,902	1,295	1,545	2,045	2,56	3,08	4,095	5,095	6,095	6,095	8,115	10,12	10,12	12,14	12,14
	min.	0,6	0,7	0,8	0,8	1,2	1,2	1,5	2	2	3	4	4,5	5,6	6,4	7,2	8	9	10
l	maat	1,4	1,5	1,6	1,7	2	2	2,5	3	3,5	5	6	8	9	10	11	12	13,5	15
	min.																		
max.																			

l	maat																				
	min.	max.																			
2	1,80	2,20																			
2,5	2,30	2,70																			
3	2,80	3,20																			
(3,5)	3,26	3,74																			
4	3,76	4,24																			
5	4,76	5,24																			
6	5,76	6,24																			
8	7,71	8,29																			
10	9,71	10,29																			
12	11,65	12,35																			
(14)	13,65	14,35																			
16	15,65	16,35																			
(18)	17,65	18,35																			
20	19,58	20,42																			
(22)	21,58	22,42																			
25	24,58	25,42																			
(28)	27,58	28,42																			
30	29,58	30,42																			
35	34,5	35,5																			
40	39,5	40,5																			
45	44,5	45,5																			
50	49,5	50,5																			
55	54,4	55,6																			
60	59,4	60,6																			